


DYEING MACHINE DM 100



Dyeing machine DM 100

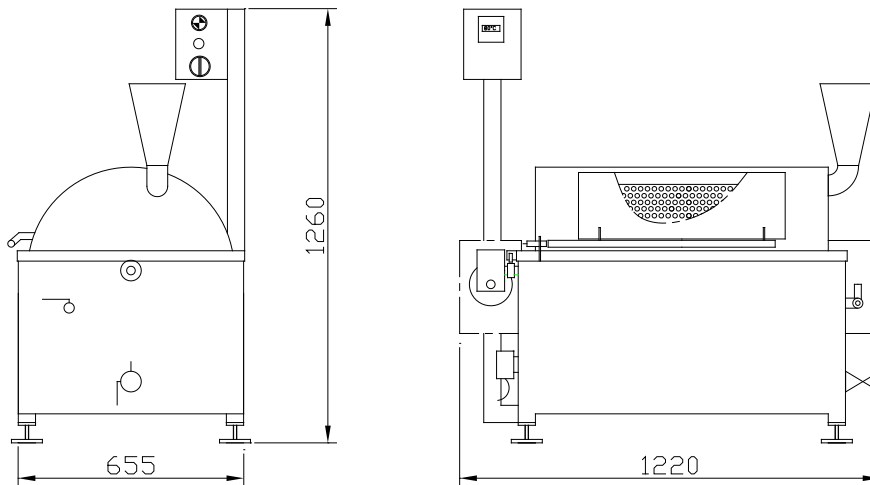

Operating principle:

Filling: Push the upper cover upwards in order to reach the dyeing drum.

The cover of the drum is fitted with hinges in its upper edge allowing the cover to open upwards. You can fill and empty the drum trough the opening.

The machine is equipped with logic control and touch screen.

In the machine you can program five standard programs. The standard program includes: water temperature, rotational speed, time and water volume.

You can change settings of the standard program before starting or while the machine is running (change the temperature, time and rotational speed and add water). You can stop the machine in the middle of the program and restart it by pushing the Pause key. (During the pause you can open the covers and check the product)

After re-start the machine continues the same program until its end.

Technical data:

Volume	max. 10 kg
Water volume	35 – 105 l
Water connection	2-5 bar, 25 l/min
Stepless rotational speed	5 – 20 rpm
Motor power	0,37 kW
Electric connection	0,37 kW, 400V 50 Hz
Total weight	185 kg

Illustration of the dyeing machine

